



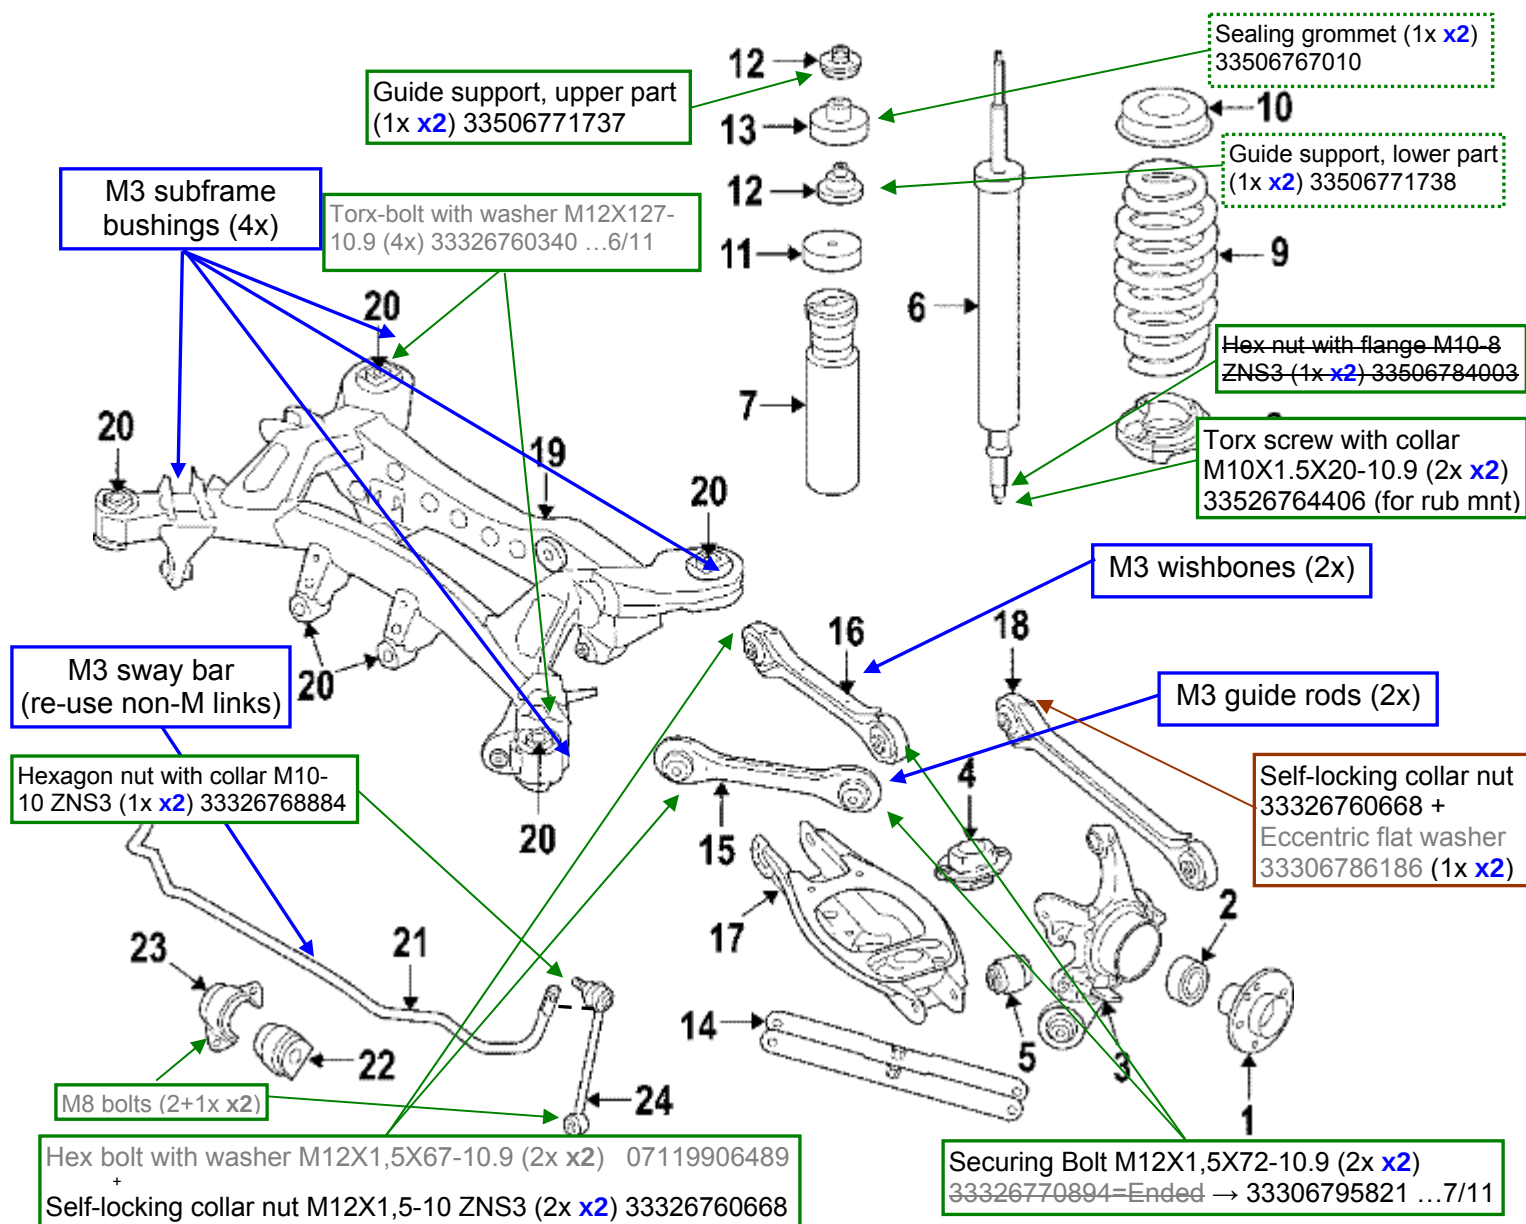

Legend:
Dotted outer = no torque
Gray = re-use part

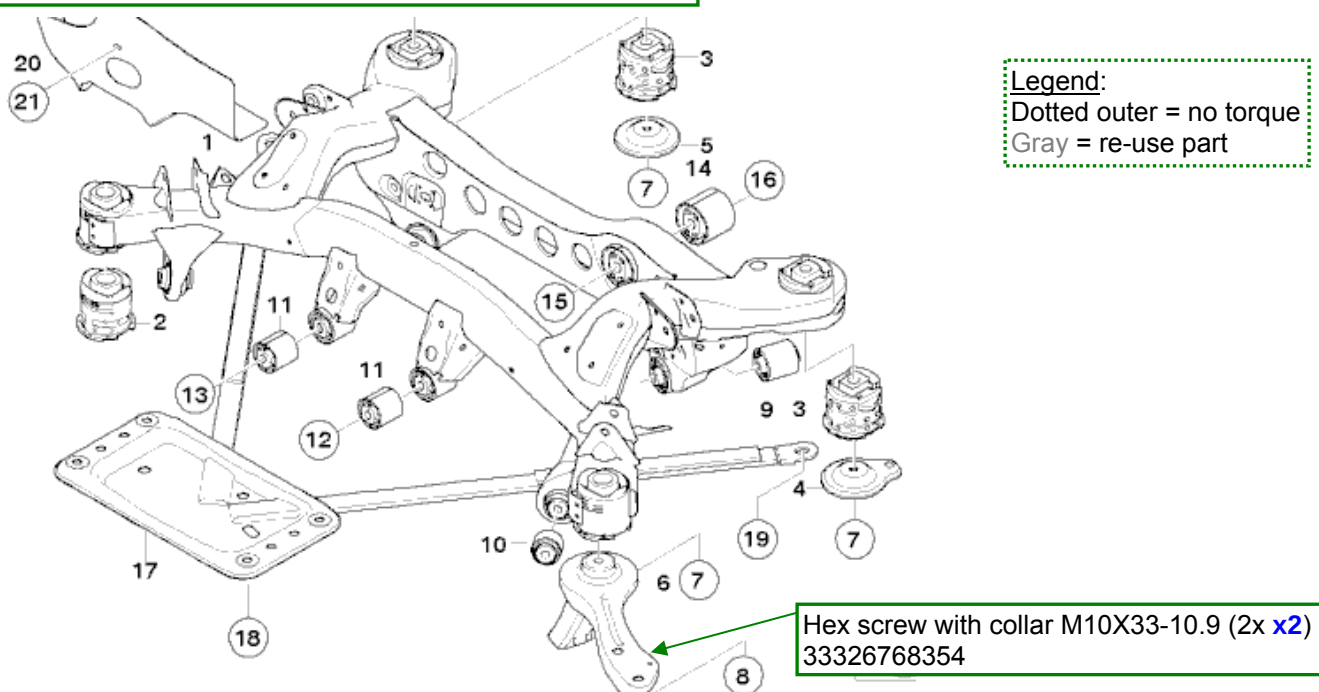

Self-locking collar nut M12X1,5-10
ZNS3 (1x **x2**) 33326760668

Washer-gasket (1x
x2) 31306772226

Self-locking collar nut M8-8
ZNS3 (3x **x2**) 31316769731

Guide support (1x **x2**)
31306775098

Combination nut M14X1,5-
10ZNNIV (1x **x2**) ...03/11
33306787062

Self-locking collar nut M12X1,5-10
ZNS3 (1x **x2**) 33326760668

Hex bolt with washer M12X1.5X115-
8.8 (2x) 31106763928
+
Self-locking collar nut M12X1,5-10
ZNS3 (1x **x2**) 33326760668

Hexagon nut with collar M10-
10 ZNS3 (1x **x2**) 33326768884

Combination nut M14X1,5-
10ZNNIV (2x **x2**) ...03/11
33306787062

M8 bolts (2x **x2**)

Hex nut M6-8-ZNS3
(1x) 07129904876


M3 sway bar
(re-use non-M links)

M3 wishbone / rear control arm
(2x) w/ headlight regulating rod

M3 tension strut / front
control arm (2x)

Hex bolt with washer M8X45-
8.8-ZNS3 (1x **x2**) 07119903931

Hex bolt with washer M12X1.5X115-
8.8 (2x) 31106763928
+
Locking Nut M12X1,5-10 ZNS3
(1x **x2**) 31106767496

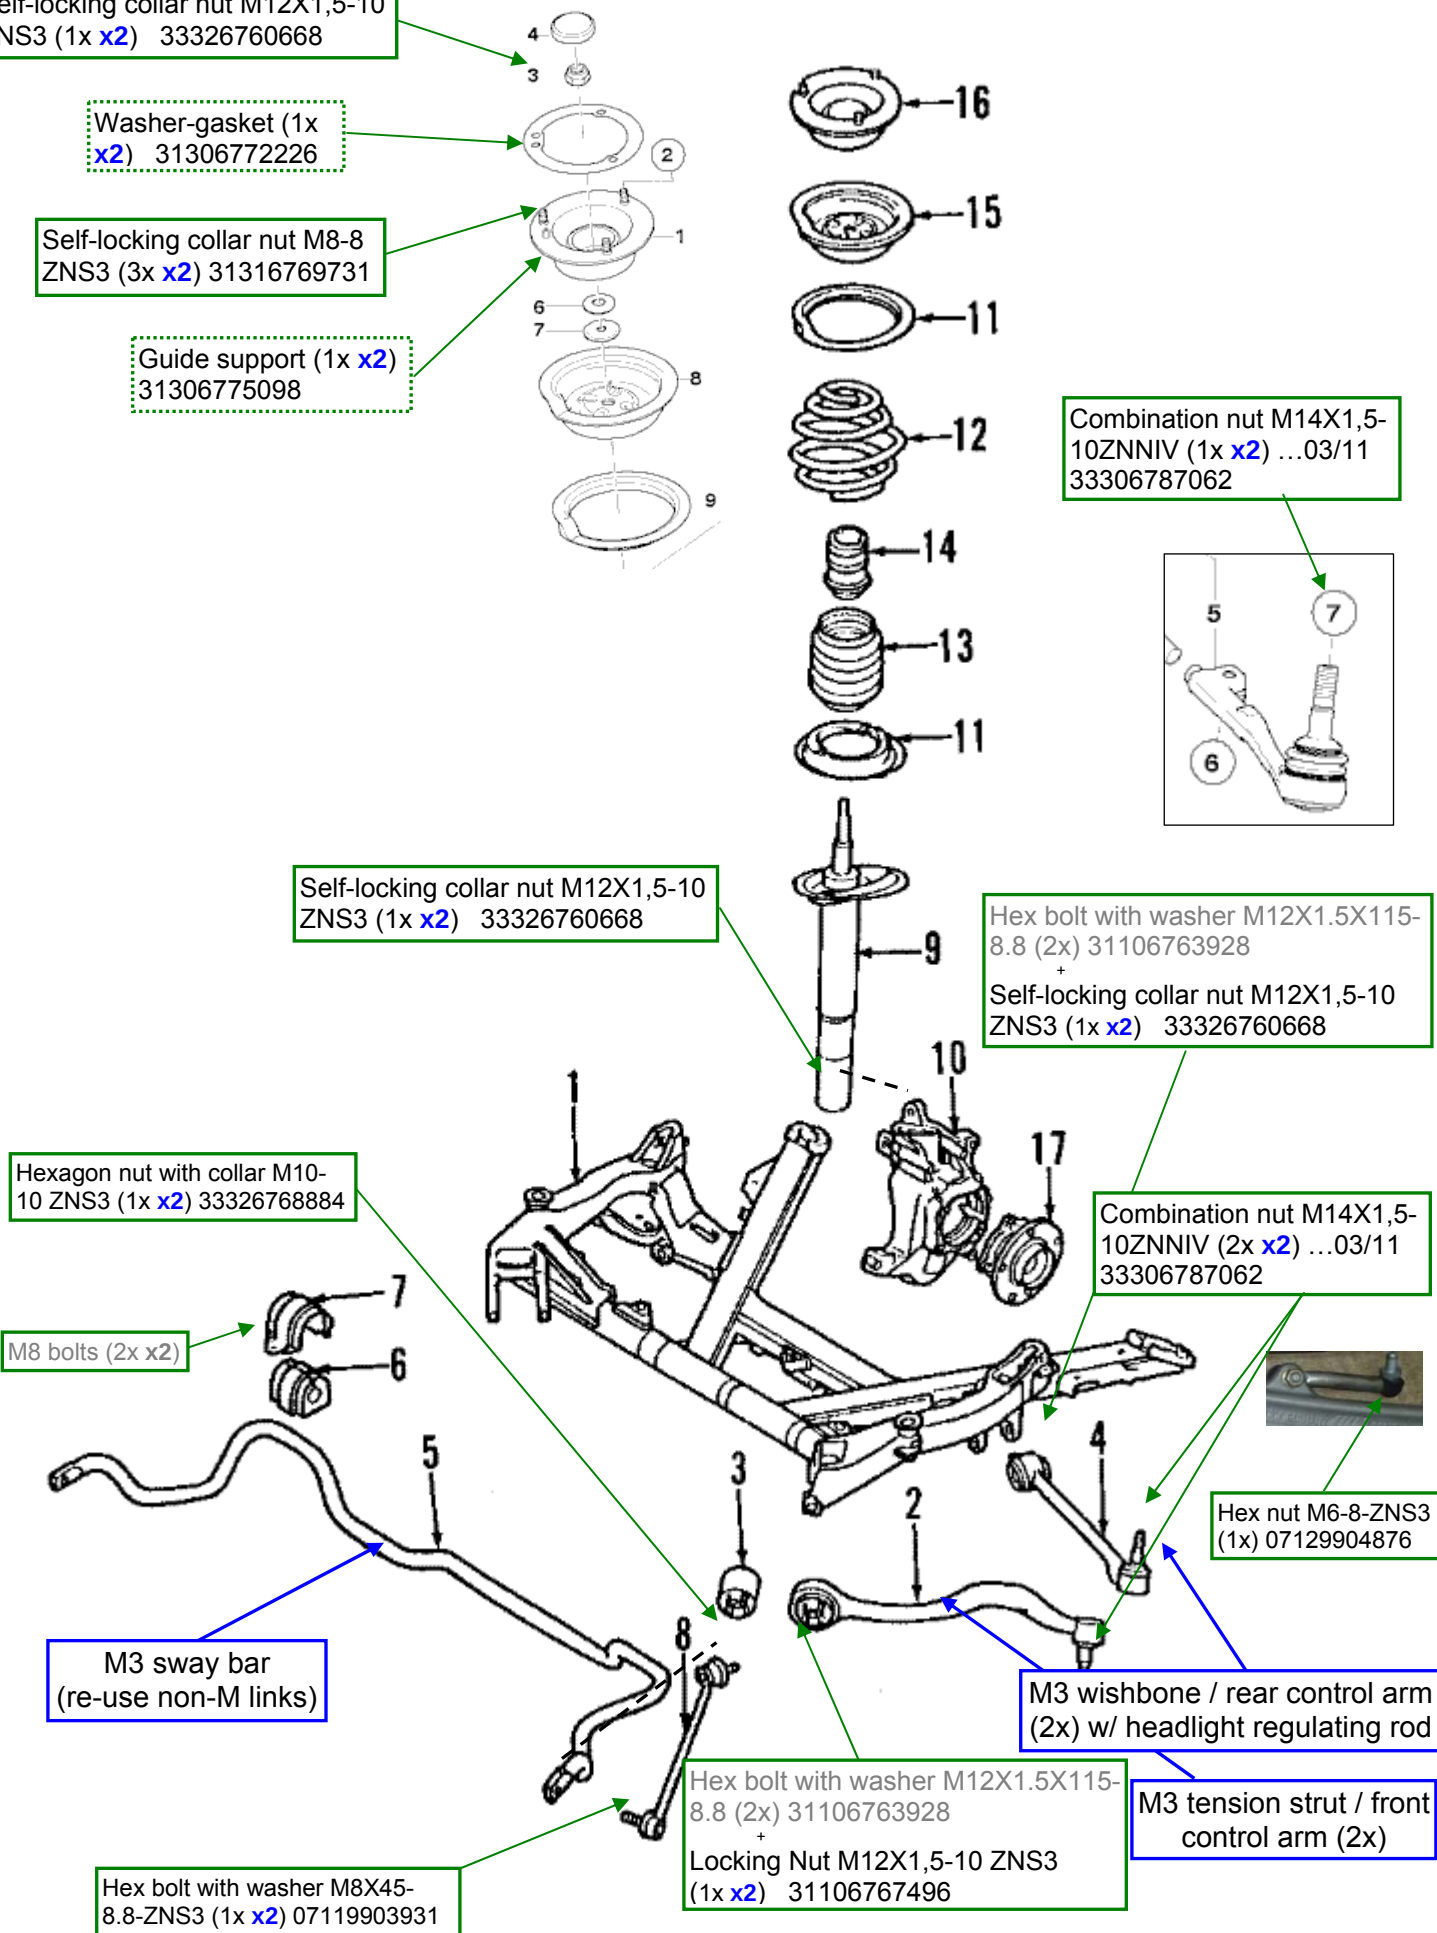

33506771737 (1x **x2**): Guide support to shock absorber

- M12: 27 Nm (20 ft-lb)
- M14: 37Nm (27 ft-lb)

M12X127 Torx-bolt with washer (4x) to body:

- 100Nm (74 ft-lb)

Sealing grommet (1x **x2**) 33506767010

- clean & lube w/ soap

Guide support, lower part (1x **x2**) 33506771738

- clean & lube w/ soap

33506784003 (1x **x2**): shock to rubber mount

- 38Nm (28 ft-lb)

33526764406 (2x **x2**): rubber mount to camber arm

- 60 Nm (44 ft-lb)

M3 wishbones (2x)

M3 guide rods (2x)

M12 nut/bolt (2x 1x **x2**): to frame/wheel carrier

- 100Nm (74 ft-lb) **

M3 sway bar (re-use non-M links)

33326768884 (1x **x2**): link to stabilizer bar

- 58Nm (43 ft-lb)

M8 bolts (2x **x2**) to brackets:

- 21 Nm (16 ft-lb)

M12 bolt + 33326760668(2x **x2**): wishbones+guide rods (inner) to frame

- 100Nm (74 ft-lb) **

M8 bolts (1x **x2**) to wheel carrier:

- 21 Nm (16 ft-lb)

33306795821 (2x **x2**): wishbones+guide rods to wheel carrier (outer)

- 100Nm (74 ft-lb) + 90 degree **

Legend:

Dotted outer = no torque

Gray = re-use part

Red torque ** = in loaded position

Brown frame = toe (done later)

brake line screws (M12x1 bolts)

- 12 Nm (9 ft-lb)

M12 bolts (1x **x2**): tension strut (v-shape reinf.) to compression strut

- 100Nm (74 ft-lb) + 90 degree

33326768354 (2x **x2**): compression strut to body

- 47Nm (35 ft-lb) + 90 degree

M8 bolts (4x **x2**): tension strut (v-shape reinf.) to body

- 24 Nm (18 ft-lb)

33326760668 (1x **x2**):
Top of strut to brg
• 64 Nm (47 ft-lb)

Washer-gasket (1x
x2) 31306772226

31316769731 (3x **x2**):
Brg to body
• 34 Nm (25 ft-lb)

Guide support (1x **x2**)
31306775098

33306787062 (1x **x2**): Tie
rod to wheel carrier
• 165 Nm (122 ft-lb)

33326760668 (1x **x2**): Swivel brg
(in wheel carrier) to Btm of strut
• 81 Nm (60 ft-lb)

Hex bolt with washer + 33326760668
(1x **x2**): tension strut to subframe
• 68Nm (50 ft-lb) + 90 degree **

33326768884 (1x **x2**):
link to sway bar
• 58Nm (43 ft-lb)

M8 bolts (1x **x2**) to
brackets:
• 21 Nm (16 ft-lb)

33306787062 (2x **x2**): control
arms to steering knuckle
• 165 Nm (122 ft-lb)

07129904876:
leveling arm/rod
• 8 Nm (6 ft-lb)

M3 sway bar
(re-use non-M links)

07119903931 (1x **x2**):
link to strut
• 58Nm (43 ft-lb)

Hex bolt with washer + 31106767496
(1x **x2**): control arm to subframe
• 68Nm (50 ft-lb) + 90 degree **

M3 wishbone / rear control arm
(2x) w/ headlight regulating rod

M3 tension strut / front
control arm (2x)

